



the power-through  
**Boom  
Power Rail**



**ASSEMBLY INSTRUCTIONS**

**Included in the boxes:**

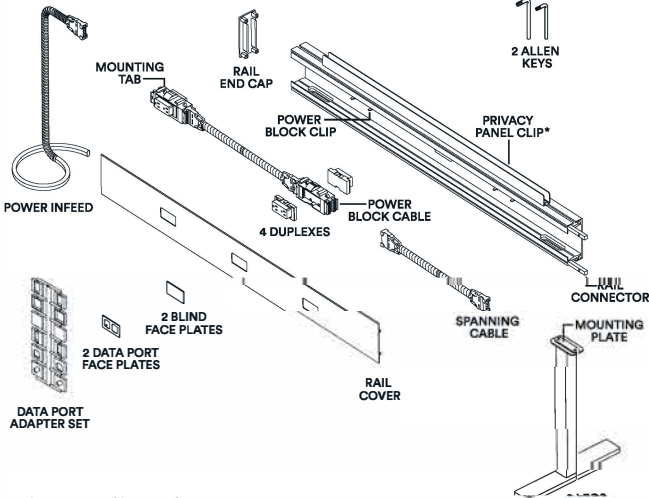

**Tools Included:**



\*Privacy Panels sold separately

**WARNING/DISCLAIMER**

To reduce the risk of burns, fire, electric shock, or injury to persons:

1. 8Trac Power System must be hardwired by a licensed electrician
2. Use this system only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.
3. Never operate this furnishing if it has a damaged power entry, if it is not working properly, if it has been damaged, or exposed to water. Contact your Facilities Manager or Poppin, Inc. to report a problem and initiate a repair or return.
4. Never drop or insert any object into any opening.
5. Risk of Electric Shock - Connect this furnishing to a properly grounded outlet only.
6. For full warranty details, visit [poppin.com](http://poppin.com)

**ABOUT POPPIN**

Poppin's furniture and office supplies are designed with your success in mind. From a day-brightening Stapler to a game-changing Desk System, Poppin is the one-stop shop for creating inspiring, modern workspaces.

Designed by Poppin in NYC

Shop the complete collection of furniture at [poppin.com](http://poppin.com)

Poppin, Inc.

For patent or patent application  
information visit [poppin.com/patents](http://poppin.com/patents)  
©Poppin 2020


888-676-7746  
[poppin.com/contact](mailto:poppin.com/contact)  
[#workhappy@poppin](mailto:#workhappy@poppin)

v02\_Jun2020

**RAIL ASSEMBLY**


**Leg Attachment**

1. Use the allen key to loosely attach the mounting plate.
2. Slide the leg's channel plate into the rail channel.
3. Position the leg as illustrated based on the overall length of your Power Rail.
4. Tighten the screws firmly.
5. Repeat for all Power Rails.








**Rail Alignment**

1. Remove and store the privacy panel clips (if not installing optional Privacy Panels).
2. Align the rails side to side.
3. Use the allen key to loosen 4 screws on 2 rail connectors.
4. Slide the rail connectors into each adjacent rail, tightening the rail connector screws.




**RECOMMENDED  
LEG PLACEMENT**

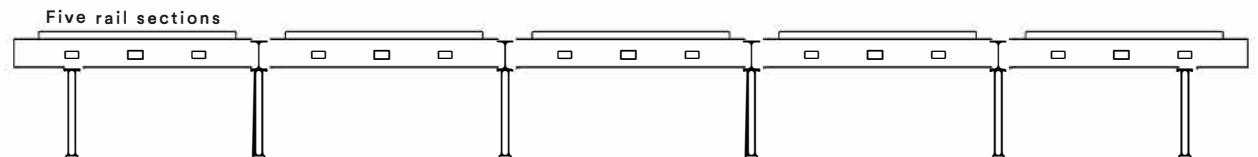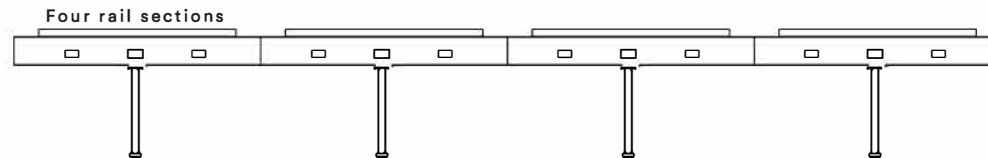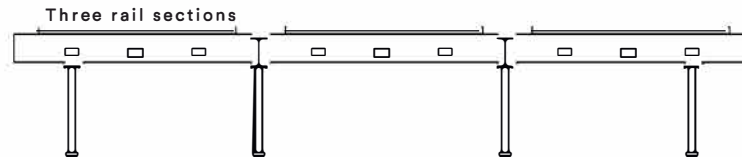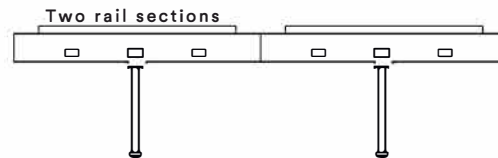

**POWER ASSEMBLY**

**Power Block Assembly**

1. Slide the duplexes into each side of the power blocks.
2. Click the spanning cables to the power block cable connection points (choose either position).
3. Align the power block mounting tabs with the powerblockclip, which is pre-installed inside the rails.
4. Click each power block into place.



**Power Infeed Connection**

1. Thread the power infeed through the underside of the Power Rail.
2. Click the power infeed into any power block.

**Power Rail Completion**

1. Cover each end of the Power Rail with the rail end caps.
2. Slot the rail cover onto the rail.
3. Install data port or blind face plates as necessary.
4. Customize the data port face plates with frames from the data port adapter set.

